


NextLight Starter Guide

844 External Router & Optical Network Terminal (ONT)




1. Connect a Cat 5E or Cat 6 Ethernet cord into the Ethernet port of the ONT.


801/803 ONT
Ethernet Port

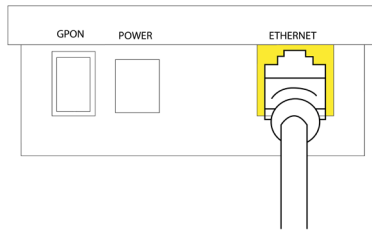


716 ONT
Port 1

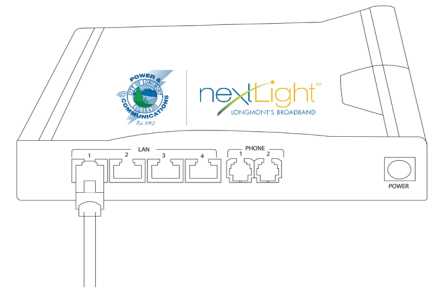

2. Connect the other end of the Ethernet cord into the ETH/WAN port of the 844E Router.

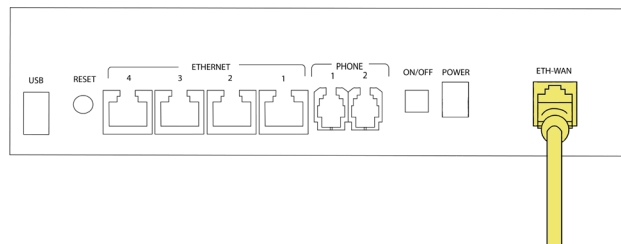

3. Plug the power cord into the 844 E Router; then plug the power cord into the nearest available outlet.

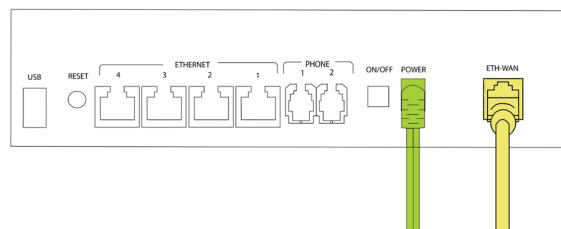

4. About 5 minutes after powering the unit on, the Power, Broadband, Service, and Wifi lights should be lit green. *Default wireless information can be found on the default settings sticker located on the side of the ONT.*

SSID is the wireless network name, **WPA-Key** is the wireless network password.

